


## CC Version Standard LED Power Supply

**PSU.0002.0**



Dimensions: (inches/mm):

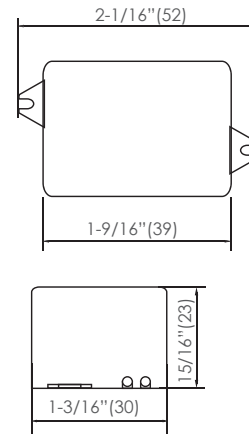

### ■ Features

- Potted LED power supply for constant current LED lamp
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- SELV/UL 8750 class 2 output
- Efficiency  $\geq 65\%$  AC120V, full load

### ■ Standards

EN 61347-1  
EN 61347-2-13  
EN 55015  
EN 61000-3-2  
EN 61000-3-3  
EN 61547  
UL 8750  
UL1310  
FCC15B

### ■ Characteristics

Rated input voltage: AC100-240V 50/60Hz (power factor measured at AC120V and full load)

Constant output current	Output voltage range	$\lambda$	$t_a$	$t_c$	L x W x H	Approval
500mA	3~9.5V	0.60c	-41~122 °F (-20~50°C)	185°F(85°C)	2-1/16"x1-3/16"x15/16" (52x30x23mm)	